

Models GH

		GH10	GH10C
Ratio capacity	1:10 / 1/9	9.68 / 10.75	9.68 / 10.75
Drum dimensions	Diameter (mm)	550	550
	Depth (mm)	400	400
	Volume (dm ³)	96.8	96.8
Door dimensions	Diameter (mm)	393.7	393.7
Drum speed / G Factor	rpm	500 ÷ 650 ÷ 1200 / 440max	500 ÷ 650 ÷ 1200 / 440max

Net dimensions and packing

Net dimensions	Width (mm)	683	683
	Depth (mm)	704	704
	Height (mm)	1027	1126
Packing dimensions	Width (mm)	737	737
	Depth (mm)	832	832
	Height (mm)	1276	1375
	Volume (m ³)	0.709	0.843
Net / Gross weight	kg	122 ÷ 132	122 ÷ 132


Water consumption

Water supply	kPa (bar)	140 ÷ 830 (1.4 ÷ 8.3)	140 ÷ 830 (1.4 ÷ 8.3)
Water inlet diameter	Inches	3/4"	3/4"
Number of inlets	N°	2	2
Drain	Inches	1" / 2"	1" / 2"
Drain type		Drain with pump / Drain with valve	Drain with pump / Drain with valve
Water consumption*	Hot water (lt)	40	40
	Cold water (lt)	72	72
	Total (lt)	112	112


Electric data

Power supply	V / ph / Hz	230-240V 1~50Hz	230-240V 1~50Hz
		230-240V 3~50Hz	230-240V 3~50Hz
		380-415V~3N 50Hz	380-415V~3N 60Hz
Heating power	kW	4.8 ÷ 2.4	4.8 ÷ 2.4
Motor power	kW	0.67	0.67
Total power	kW	5.47 ÷ 3.07	5.47 ÷ 3.07
Fuse	A	10 ÷ 16 ÷ 30	10 ÷ 16 ÷ 30
Noise	dB	<65	<65

Model with drain pump

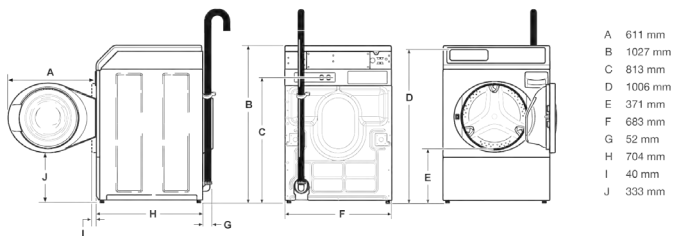

Model with drain valve

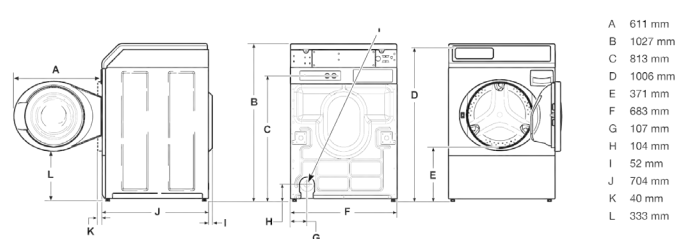

Provide GFCI (differential switch) Class "B" once the appliance is installed

*The standard ISO9398 provides for the examination of the performance of the machine as a function of a wash cycle composed of a washing phase at 60°C, 3 rinse phases and a final spin at full power, corresponding to a load equal to a nominal capacity with a 1:10 ratio, of towels cotton fabric weighing 420g/m² with dimensions of 60cm x 90cm.

GH10 - GH10C 201808 rel.01 REF. GR0000000B079

The manufacturer declines all responsibility for any inexactitudes contained in this catalogue. The manufacturer reserves the right to bring, without warning, any modifications he might believe necessary, without changing the essential characteristics of the product.