

GHD10 - GHD10C

TOWER SYSTEM
WASHING MACHINES
AND TUMBLE DRYERS
FROM SmallPRO RANGE



TUMBLE DRYER SERIES Small PRO


Features

- Galvanized steel cylinder
- Oversized lint filter located in front for easy cleaning
- Powerful exhaust blower assures short drying times and low operating costs
- Wide door opening of 180° for easy loading and unloading. Reversing opening even while already installed
- Ergonomic control panel with tilt
- Top, front and side panels standard available in anthracite grey
- Electrical or gas heating
- 4 drying programs
- LED indication of the status of the program
- Time remaining countdown
- Coin op version on option

Options

- Self-service version with connectable central payment unit
- For self-service versions please refer to the model GHD10C

PC programming optionals



Washing and drying diagrams complete customization. The transfer data is made via infrared communication kit that prevents the access inside the equipment to enable communication.

Audit of working data like performed programs and alarm history, all reported to date and time of the event that are constantly stored.

WASHING EXTRACTORS SERIES Small PRO

Features

- Cushioning springs and shock absorbers: it can be installed in all flooring kind and at each floor
- Electronic out of balance check
- Mechanical balancing system with moving balls
- Front, side and top gray painted
- Inner and outer drums made of stainless steel AISI304
- The door opens up to 180 ° to facilitate loading and unloading process
- Ergonomic control panel with tilt
- Heating elements placed on front side of the tub to speed up and facilitate the maintenance
- Standard version with pump drain valve (gravity valve is optional)
- Soap hopper with 4 compartments
- Up to 440G and 1200rpm spin speed that allows to:
 - have less residual moisture
 - minimize the drying costs
- 6 wash programs and in addition the possibility to modify parameters. Regular editing options:
 - A = standard washing cycle
 - B = additional prewash
 - C = additional prewash and rinse
- Delayed start up to 72h

Options

- Drain valve instead of drain pump
- Self-service version with connectable central payment unit
- For self-service versions please refer to the model GHD10C
- Soap pumps connections for up to 4 signals and 2 pipes connection



Models GHD

		GHD10		GHD10C	
Ratio capacity	1:10 - 1:9 / 1:20	9.68 / 10.75	9.9	9.68 / 10.75	9.9
Drum dimensions	Diameter (mm)	550	655	550	655
	Depth (mm)	400	550	400	550
	Volume (dm ³)	96.8	198	96.8	198
Door dimension	Diameter (mm)	393.7	530 x 425	393.7	530 x 425
Drum speed / G factor	rpm	500 ÷ 650 ÷ 1200 / 440max	50	500 ÷ 650 ÷ 1200 / 440max	50

Net dimensions and packing


Net dimensions	Width (mm)	683	683
	Depth (mm)	704	704
	Height (mm)	1986	1986
Packing dimensions	Width (mm)	737	737
	Depth (mm)	832	832
	Height (mm)	2152	2152
	Volume (m ³)	0.709	0.843
Net / Gross weight	kg	177 ÷ 193	177 ÷ 193

Water consumption

Water supply	kPa (bar)	140 ÷ 830 (1.4 ÷ 8.3)	/	140 ÷ 830 (1.4 ÷ 8.3)	/
Inlet diameters	inches	3/4"	/	3/4"	/
Number of inlets	N°	2	/	2	/
Drain	inches	1" / 2"	/	1" / 2"	/
Type of drain		Drain pump / Drain valve	/	Drain pump / Drain valve	/
Water consumption*	Hot water (lt)	40	/	40	/
	Cold soft water (lt)	72	/	72	/
	Total (lt)	112	/	112	/

Electric and gas heating data

Power supply	V / ph / Hz	230-240V 1~50Hz	230-240V 1~50Hz		
		230-240V 3~50Hz	230-240V 3~50Hz		
		380-415V~3N 50Hz	380-415V~3N 60Hz		
Electric thermal power	kW	4.8 ÷ 2.4	5.3 ÷ 5.2	4.8 ÷ 2.4	5.3 ÷ 5.2
Gas thermal power	kW	/	5.3	/	5.3
Motor power	kW	0.67	0.25	0.67	0.25
Total electric power	kW	5.47 ÷ 3.07	5.55 ÷ 5.45	5.47 ÷ 3.07	5.55 ÷ 5.45
Fuse	A	10 ÷ 16 ÷ 30	10 ÷ 16 ÷ 30	10 ÷ 16 ÷ 30	8 ÷ 16 ÷ 30
Noise	dB	<65	<52	<65	<52

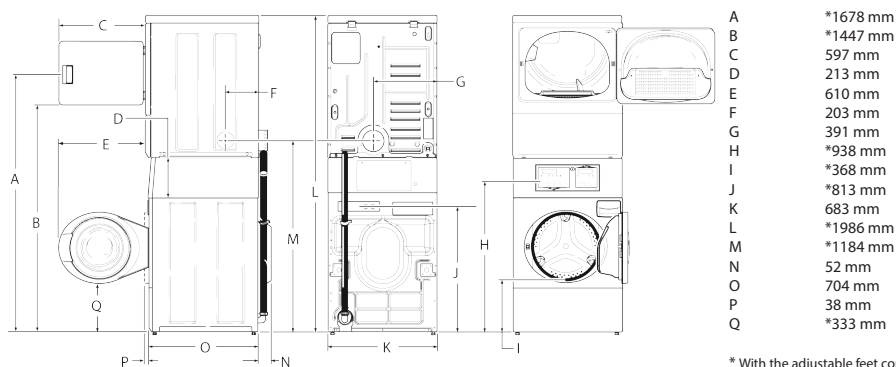

* With the adjustable feet completely screwed

Provide GFCI (differential switch) Class "B" once the appliance is installed

*The standard ISO9398 provides for the examination of the performance of the machine as a function of a wash cycle composed of a washing phase at 60°C, 3 rinse phases and a final spin at full power, corresponding to a load equal to a nominal capacity with a 1:10 ratio, of towels cotton fabric weighing 420g/m² with dimensions of 60cm x 90cm.

GHD10 - GHD10C 201808 rel.01 REL GR00000000B080

The manufacturer declines all responsibility for any inaccuracies contained in this catalogue. The manufacturer reserves the right to bring, without warning, any modifications he might believe necessary, without changing the essential characteristics of the product.

Grandimpianti i.l.e - Aligroup S.r.l. a Socio Unico
via masiere, 211/c - 32037 sospiolo (BL) Italy
ph. +39 0437 848 711 - fax +39 0437 879 108
www.grandimpianti.com - info@grandimpianti.com



COMPANY WITH
MANAGEMENT SYSTEM
CERTIFIED BY DNV GL
= ISO 9001 =
= ISO 14001 =

an Ali Group Company



The Spirit of Excellence